

Variantico Group

variantico.eu

LIFTING TABLES

Catalog 2024




Variantico Group Sp. z o.o.

Swieradowska Str. 47
02-662 Warsaw
Poland

Electric Lift Table - 1000 kg

- Electric Scissor Lift with a Capacity of 1000 kg
- Adjustable height for comfortable operation in various situations
- Smooth movements ensuring operational stability
- Control via a push-button panel with an emergency stop button
- Safety frame that halts descent in case of an obstruction
- Solid rectangular steel construction ensuring durability
- Removable rollers and stabilizing wheels for greater mobility
- Motor with IP54 protection rating for dust and water resistance
- Lifting time: 20 seconds
- Adjustable valve for precise control
- Power supply voltage: 380V

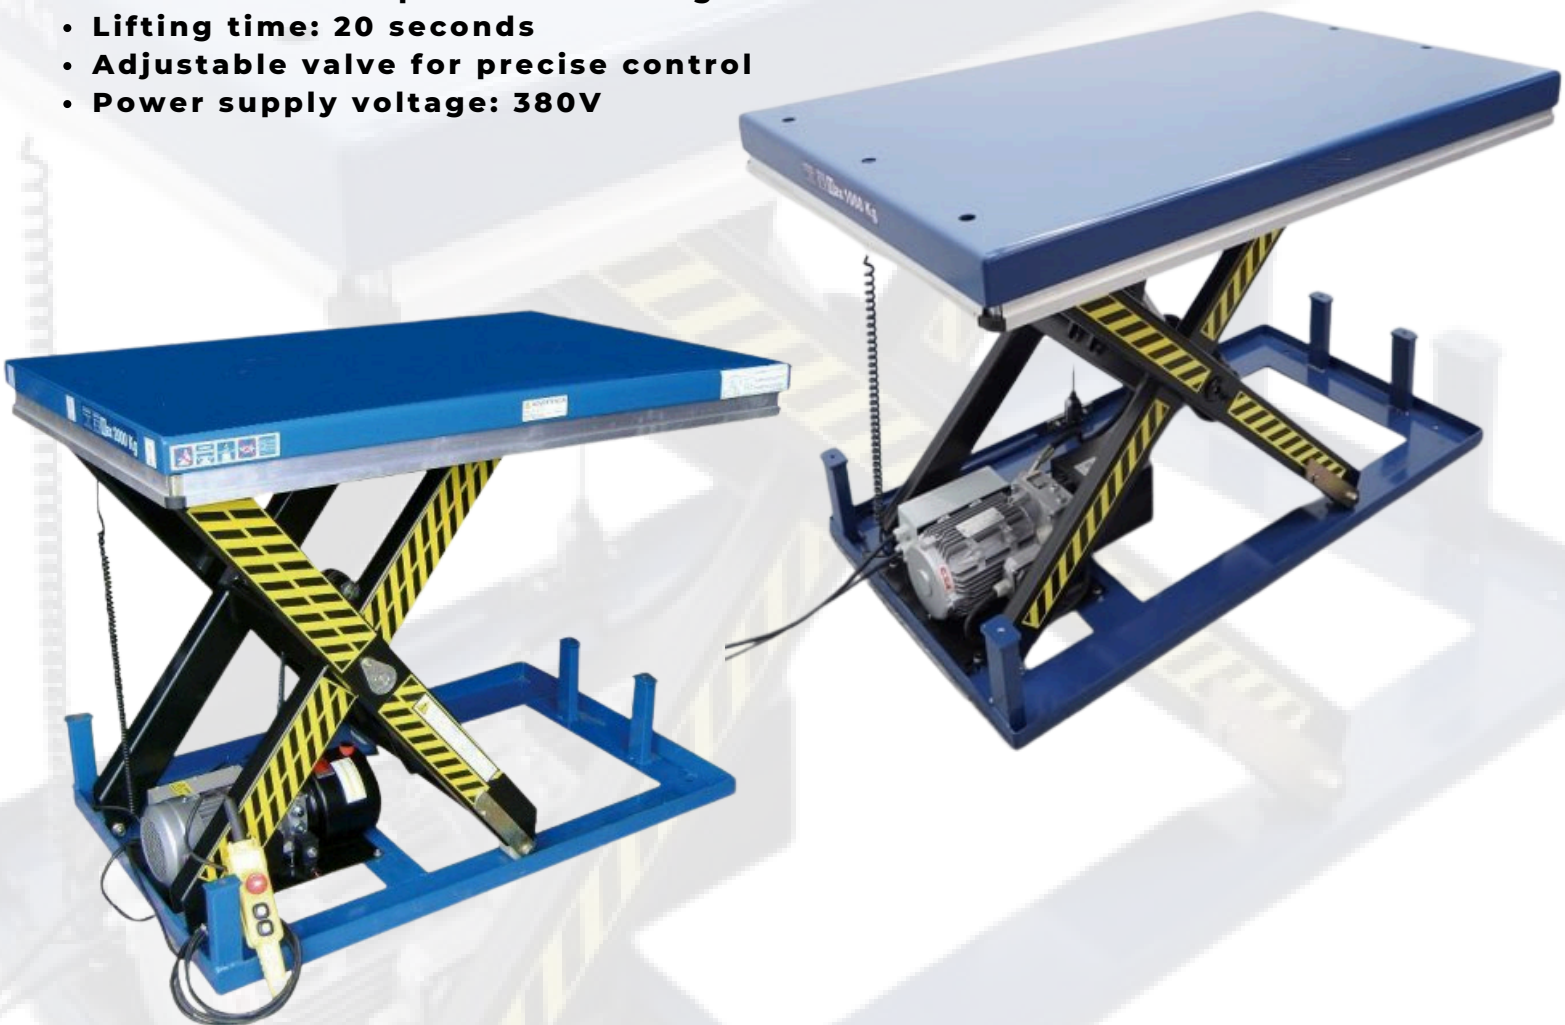

Base dimensions, mm	Maximum height, mm	Height when folded, mm	Weight, kg	Load capacity, kg
1300 x 820	1000	205	158	1000

*The catalog includes selected lifting tables. We also offer the possibility of designing a table according to customer requirements.

Electric Lift Table - 1000 kg

- **Electric Scissor Lift with a Capacity of 1000 kg**
- **Adjustable height for a comfortable working position in various applications (assembly stations, inspection, palletizing, machine exits)**
- **Smooth movements ensuring operational stability**
- **Control via a push-button panel with an emergency stop button**
- **Safety frame that halts descent upon encountering an obstacle**
- **Solid rectangular steel construction for durability and stability**
- **Safety hoop**
- **0.75 kW motor with IP54 protection rating for dust and water resistance**
- **Lifting time: 12 seconds**
- **Adjustable valve for precise control**
- **Removable rollers and stabilizing wheels**
- **Power supply voltage: 380V**



Base dimensions, mm	Maximum height, mm	Height when folded, mm	Weight, kg	Load capacity, kg
800 x 600	710	180	150	1000

*The catalog includes selected lifting tables. We also offer the possibility of designing a table according to customer requirements.

Electric Lift Table - 3000 kg

- **Electric Scissor Lift with a Capacity of 3000 kg**
- **Adjustable height for a comfortable working position in various applications (assembly stations, inspection, palletizing, machine exits)**
- **Smooth movements for stable operation**
- **Panel control with an emergency stop button**
- **Safety frame that halts descent upon encountering an obstacle**
- **Rectangular steel construction for stability and durability**
- **Safety hoop**
- **3.0 kW motor with IP54 protection rating, resistant to dust and moisture**
- **Lifting time: 70 seconds**
- **Adjustable valve for precise control**
- **Removable rollers and stabilizing wheels**
- **Power supply voltage: 380V**



Base dimensions, mm	Maximum height, mm	Height when folded, mm	Weight, kg	Load capacity, kg
3500 x 1500	3500	550	1000	3000

*The catalog includes selected lifting tables. We also offer the possibility of designing a table according to customer requirements.

Electric Lift Table - 4000 kg

- **Electric Scissor Lift with a Capacity of 4000 kg and Ramp**
- **Adjustable height providing a comfortable working position for various applications (assembly stations, control, palletizing, machine exits)**
- **Smooth movements for stable operation**
- **Panel control with an emergency stop button**
- **Safety frame that halts descent upon encountering an obstacle**
- **Rectangular steel construction for high stability and durability**
- **Safety hoop**
- **2.2 kW motor with IP54 protection rating, resistant to dust and moisture**
- **Lifting time: 35 seconds**
- **Adjustable valve for precise control**
- **Removable rollers and stabilizing wheels**
- **Power supply voltage: 380V**



Base dimensions, mm	Maximum height, mm	Height when folded, mm	Weight, kg	Load capacity, kg
2500 x 2000 (+400 rampa)	1980	380	860	4000

*The catalog includes selected lifting tables. We also offer the possibility of designing a table according to customer requirements.

Electric Lift Table - 4000 kg

- **Electric Scissor Lift with a Capacity of 4000 kg**
- **Adjustable height for a comfortable working position in various applications (assembly stations, control, palletizing, machine exits)**
- **Smooth and stable movements**
- **Control via a push-button panel with an emergency stop button**
- **Safety frame that halts descent upon encountering an obstacle**
- **Solid rectangular steel construction ensuring stability and durability**
- **Safety hoop**
- **3.0 kW motor with an IP54 protection rating, resistant to dust and moisture**
- **Lifting time: 40 seconds**
- **Adjustable valve for precise control**
- **Removable rollers and stabilizing wheels**
- **Power supply voltage: 380V**



Base dimensions, mm	Maximum height, mm	Height when folded, mm	Weight, kg	Load capacity, kg
2000 x 1000	1500	300	470	4000

*The catalog includes selected lifting tables. We also offer the possibility of designing a table according to customer requirements.

Electric Lift Table - 1500 kg

- **Exceptionally Flat Scissor Lift Table with U-Shaped Platform**
- **Designed for handling pallets weighing up to 1500 kg**
- **Pallets can be placed and removed directly from the platform using a pallet truck**
- **No excavation is required for installation, allowing for easy relocation**
- **Control via a push-button panel with an emergency stop button**
- **Safety frame that halts descent upon encountering an obstacle**
- **Solid rectangular steel construction ensuring stability and durability**
- **Power supply voltage: 380 V**
- **Lifting time: 30 seconds**
- **1.5 kW motor**



Base dimensions, mm	Maximum height, mm	Height when folded, mm	Weight, kg	Load capacity, kg
1600 x 1200 (U 1200 x 590)	880	105	380	1500

*The catalog includes selected lifting tables. We also offer the possibility of designing a table according to customer requirements.

Electric Lift Table - 1000 kg

- **Exceptionally Flat Scissor Lift Table with U-Shaped Platform**
- **Designed for handling pallets weighing up to 1000 kg**
- **Pallets can be placed and removed directly from the platform using a pallet truck**
- **No excavation is required for installation, allowing for easy relocation**
- **Control via a push-button panel with an emergency stop button**
- **Safety frame that halts descent upon encountering an obstacle**
- **Solid rectangular steel construction ensuring stability and durability**
- **Power supply voltage: 380 V**
- **Lifting time: 25 seconds**
- **0.75 kW motor**



Base dimensions, mm	Maximum height, mm	Height when folded, mm	Weight, kg	Load capacity, kg
1450 x 1140 (U 1050 x 575)	840	85	280	1000

*The catalog includes selected lifting tables. We also offer the possibility of designing a table according to customer requirements.